

**International Journal of Engineering & Technology** 

Website: www.sciencepubco.com/index.php/IJET

Research paper



## Real time implementation and validation of lean implementation model for sustainability (LIMS) in medium scale industry

S. Gunasekharan<sup>1</sup>\*, D. Elangovan<sup>2</sup>, S. Sudhakara Reddy<sup>1</sup>, M. Maheswari<sup>1</sup>

<sup>1</sup> Professor, Malla Reddy Engineering College (A), Secunderabad
<sup>2</sup> Professor, PSG Institute of Technology & Applied Research, Coimbatore \*Corresponding author E-mail: guna03gm@gmai.com

#### Abstract

Lean manufacturing is a strategic tool, which is used to cut down waste and to improve the efficiency of an organization and helps the organization to sustain in the competitive environment. Implementation of lean systems in organization results in reduce energy consumption, waste generation, and hazardous materials used while also building the companies' images as socially responsible organizations. Several research efforts discussed in the literature indicate that lean companies show significant environmental improvements by being more resource and energy efficient. Lean systems are associated with waste reduction techniques. In foreign, many industries have started implementing these concepts and they are getting good results. In India, companies are facing problems in implementing lean concept. Critical success factors for lean system implementation in Indian medium scale manufacturing industries has been identified to overcome it. The factors are grouped into different levels by Interpretive Structural Modelling (ISM). A lean implementation model has been developed for medium scale industry and named as 'LIMS'. This paper investigates the implementation and validation of the LIMS through the real time implementation in a medium scale industry.

Keywords: Lean Manufacturing; ISM; LIMS; Critical Success Factor (CSF).

## 1. Introduction

Lean manufacturing or lean production, often simply "lean", is a systematic method for the elimination of waste or muda within a manufacturing system (Upadhye et al., 2010; Ping-yu, Yang, 2009). Lean also takes into account waste created through over burden or muri and waste created through unevenness in workloads or mura (Shah, Rachna, and Peter T. Ward, 2007). The seven types of wastes are defined as Overproduction, Waiting, Transportation, Inventory, Over Processing, Motion and Defects. Constant effort at cost reduction is required to maintain continuous profits in manufacturing. The prime way to reduce costs is to produce only those products determined by sales in a timely fashion, to restrain excessive manufacturing and to eliminate all waste in manufacturing methods (Achanga, P., et al., 2005)

Diaz-Elsayed, Nancy, et al., 2013). There are various ways to analyze and implement cost reduction, from the start of designing all the way through to manufacturing and sales (Cezar Lucato and Wagner, 2014; Fullerton, Rosemary R et al., 2003). One of the goals of lean manufacturing is to locate waste in each process and then eliminate it. It is possible to uncover a very large amount of waste by observing employees, equipment, materials and organization on the actual production line from the perspectives of the process itself and the actual work involved (Bhasin, Sanjay, and Peter Burcher, 2006). Some types of waste are obvious, but others are hidden. Waste never improves value; it only increases cost. The thorough elimination of waste leads to greater employee self-respect and to major cost reductions by preventing unneeded losses (Browning, Tyson R., and Ralph D. Heath, 2009).

## 2. Lean tools

Lean tools that are assist in the identification and steady elimination of waste. As waste is eliminated, quality improves while production time and cost are reduced (Ramesh V. Narang). A non-exhaustive list of such tools are Just In-Time (JIT), Five S (5S) (Rojasra, P. M., and M. N. Qureshi, 2013), Bottleneck analysis, Continuous flow, Value Stream Mapping (VSM), Single Minute Exchange of Dies (SMED), Kanban or Small batch sizes, Kaizen, Poke-a-Yoke or Error-proofing and Total Productive Maintenance (TPM) (Samson Danny and Mile Terziovski, 1999; Cua at al., 2001).

#### 2.1. Benefits of lean manufacturing

The benefits of lean manufacturing are evident in many industries throughout the world. Industries report improved product quality, reductions in cycle time, reduced work in progress (WIP), improved on-time deliveries, improved net income (McKone et al., 2001), decreased costs, improved utilization of labor, reduction in inventories, quicker return on inventory investment, higher levels of production, increased flexibility, improved space utilization, reduction in tool investment, a better utilization of machinery, stronger job focus and better skills enhancement. Typical results reported (Zimmer 2000; Pavnaskar, Gershenson et al. 2003) after successful lean implementation indicates:

- 50% or greater increases in capacity in current facilities
- 80% reduction in floor space
- 50% improvement in quality

Copyright © 2018 S. Gunasekharan et. al. This is an open access article distributed under the <u>Creative Commons Attribution License</u>, which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

- 95% machine availability
- 80–90% reduction in changeovers
- 60% reduction in cycle times

Typical characteristics of a lean industry include integrated single piece flow; defect prevention; production pill; continuous waste reduction; flexible team based work; active involvement and close integration with suppliers (Womack and Jones 2003). Some of the very common benefits include

- Decreased lead times for production.
- Reduced inventories.
- More robust process.
- Improved knowledge management.

From Toyota Production System (TPS) to lean industry and lean supply chain practitioners can easily find plenty of tools to improve projects. However, applying all lean tools at once only leads to chaos. Selecting the right tools for their current condition becomes the key to success in lean implementation. This paper deals about the development of generic lean model for lean implementation and enlighten the real time validation of the lean model in a medium scale industry to improve the productivity.

# **3.** Development of lean implementation model for sustainability in medium scale industries

The representation of real world in terms of either graph or mathematical equations or structure is known as modeling. The modeling is classified into three types based on their degree of concept related with the real one. They are,

- Iconic model like model airplane or train
- Analogous model such as chart, graph, map and network diagram
- Symbolic model such as mathematical equation
- This paper deals about the analogous modeling of lean manufacturing process.

#### 3.1. Lean modeling

Lean modeling is a strategy used in the industry to eradicate the waste systematically during the process to fulfill the customer needs. The customer satisfaction will make the industry to get more returns and brand name (Marasini et al., 2014). The goal of the lean model is to maintain the customer for longer run (Bergmiller, Gary G., and Paul R. McCright, 2009). In all lean implementation involves basically three practices such as just-in-time inventory, total quality management and continuous improvement to reduce the waste and improve the quality with compact price.

## **3.2. Development of generic lean model for medium scale industries**

It is a difficult assignment to implement the new concept in medium scale industries in India because of unskilled employee who hesitate to switch over to a new methodology and environment (Chikhalikar, Pratik and Suman Sharma, 2015; Nellore, Rajesh ET al.1999). This work proposes an easy to implement and low cost model for medium scale industries and it is named as Lean Implementation Model for Sustainability (LIMS) and is shown in Figure 1.

As a first step, the entire process is subdivided into six major sections to develop a lean model as follows,

• Identification of critical success factors (CSF)

Ranking and prioritization of CSF based on weightage determined by using ISM technique

- Analysis of current status for lean implementation
- List and summarize the feasible CSF for lean implementation
- Initialize the lean implementation for each CSF
- Pilot analysis, monitoring and control

#### 3.3. Identification of critical success factors (CSF)

The critical success factors which are the barriers for lean implementation in medium scale industries to be identified based on the field survey and experts' opinion. Then prioritize the identified critical success factors by using any one the MCDM techniques.

## **3.4.** List and summarize the feasible csf for lean implementation

The status need to be assessed before implementation of lean. It can be done through getting feedback from management regarding financial constraints, employee regarding adaption to new environment, customer regarding the satisfaction level and supplier about the quality raw material

(Flynn et al., 2004). Based on the feedback received, it is possible to ascertain the current situation of the industry and able to list the problems in it. The problems can be identified through the feedback from the management, employee, customer and supplier. Then the analysis needs to be done to find out the causes for each problem. There are several tools available for analysis the causes of the problems like,

- Cause and effect diagram
- Flow diagram
- Histogram
- Pareto chart
- Scatter diagram
- Control charts and
- Trend chart

Once the problems are identified, prioritization of the problems needs to be done immediately for improvement.

#### 3.5. Pilot analysis monitoring and control

Now it is the time to implement the lean concepts instead of traditional practices. It is well known that there are a lot of challenges and barriers during implementation and it should be addressed properly. First and foremost step is to train the employees for a day or a week according to the feasibility of the industry in each level through lean consultants for a better implementation. The lean implementation process will not end merely at execution level and it needs continuous monitoring and corrective actions at each level to reach the target level. It can be executed by statistical quality control (Flynn et al, 1994; Narasimhan et al., 2006).

### 4. Real time implementation of LIMS model

The proposed LIMS model has been implemented in MSI-X, Hosur to validate it. MSI-X is manufacturing locomotive products like gear box, gear wheel, piston rod and connecting rod with the support of 40 employees. The Table 1 shows the consolidation of six month report of production database.

| Tuble I. Consolidated Report of 1951 A before Lean implementation |          |          |          |          |          |          |                |
|---|----------|----------|----------|----------|----------|----------|----------------|
| Description   | Jun-2014 | Jul-2014 | Aug-2014 | Sep-2014 | Oct-2014 | Nov-2014 | Six Month Avg. |
| Avg. units of production/ day                                     | 822      | 796      | 790      | 824      | 812      | 820      | 810.67         |
| Avg. units accepted in first level/ day                           | 720      | 714      | 722      | 723      | 752      | 740      | 728.50         |
| % of accepted units in first level/ day                           | 87.59    | 89.70    | 91.39    | 87.74    | 92.61    | 90.24    | 89.86          |
| Average units rejected/ day                                       | 102      | 82       | 68       | 101      | 60       | 80       | 82.17          |
| Average units of rework/ day                                      | 12       | 8        | 5        | 14       | 6        | 9        | 9              |
| Average units of scrap/day  | 90       | 74       | 63       | 87       | 54       | 71       | 73.17          |

#### Table 1: Consolidated Report of MSI-X before Lean Implementation

| Average of finished units/day          | 732   | 722   | 727   | 737   | 758   | 749   | 737.50 |  |
|--|-------|-------|-------|-------|-------|-------|--------|--|
| % of finished units in final stage/day | 89.05 | 90.70 | 92.03 | 89.44 | 93.35 | 91.34 | 90.97  |  |

From the Table 1 it is observed that the average productivity per day is 810 units of gear box, gear wheel, connecting rod and piston rod. Among the total production 728 units are accepted and 82 units are rejected in the first level. In the rejected quantity 9 units have undergone for rework and the average finished products at the final become 737 units and the level of productivity is 90.97%. The month wise report of average units of production, finished products and scrap per day before lean implementation is depicted in Figure 2. The average cost for raw material per month is rupees four crores.

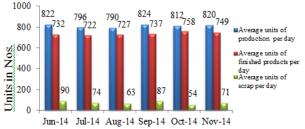


Fig. 2: Monthly Reports on Production, Finished Products and Scrap before Lean Implementation.

## 4.1. Lean implementation for each CSF

From the above discussion, it is clear that the average productive rate per day of the industry is 90.97 %. It is considerably low and it should be addressed properly through lean implementation. The lean tools chosen and method of implementation is discussed in the succeeding sections.

The lean implantation process started in MSI-X from the month of December 2014. To implement the above said lean concepts and get practiced by the employees, it has taken four months from December 2014 to March 2015. The monitoring and control has taken place at every step and remedial actions are taken then and there suitably. The improvement of the industry has measured from the month of April 2015 in terms of its productivity as shown in Table 2.

| Table 2: Consolidated Report of MSI-X after Lean Implementation |          |          |          |          |          |          |                |
|---|----------|----------|----------|----------|----------|----------|----------------|
| Description   | Apr-2015 | May-2015 | Jun-2015 | Jul-2015 | Aug-2015 | Sep-2015 | Six Month Avge |
| Avg. units of production/day                                    | 831      | 802      | 820      | 815      | 821      | 818      | 817.83         |
| Avg. units accepted in first level /day                         | 742      | 738      | 765      | 794      | 798      | 795      | 772.00         |
| % of accepted units in first level/day                          | 89.29    | 92.02    | 93.29    | 97.42    | 97.20    | 97.19    | 94.40          |
| Avg. units rejected/day   | 89       | 23       | 55       | 21       | 23       | 23       | 39.00          |
| Avg. units of rework/day  | 10       | 4        | 12       | 0        | 3        | 2        | 5.17           |
| Avg. units of scrap/day   | 79       | 19       | 43       | 21       | 20       | 21       | 33.83          |
| Avg. of finished units/day                                      | 752      | 742      | 777      | 794      | 801      | 797      | 777.17         |
| % of finished units in final stage/day                          | 90.49    | 92.52    | 94.76    | 97.42    | 97.56    | 97.43    | 95.03          |

From the Table 2 it is observed that the average productivity per day is 817 units of gear box, gear wheel, connecting rod and piston rod. Among the total production 772 units are accepted and 39 units are rejected in the first level. In the rejected quantity [5] units have undergone for rework and the average finished products at the final become 777 units and the level of productivity is 95.97 %. The month wise report of average units of production, finished products and scrap per day after lean implementation is depicted in Figure 3.

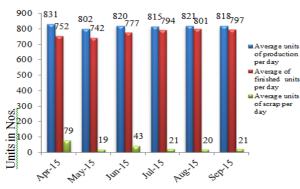


Fig. 3: Monthly Reports on Production, Finished Products and Scrap after Lean Implementation.

It is found happy that the production status of MSI-X has shown a better improved after lean implementation. It is evident from the Table 3 and Figure 4 that the average production unit per day has improved from 810.67 units to 817.83 units due to lean implementation. Similarly there is a remarkable improvement in the level of units accepted per day as 94.40 % from 89.86 %. There is a reduction in units considered for rework is reduced to five units per day. At the same time, the scrap is also dropped to 33.83 units per day which is a significant improvement than the previous situation. Due to the above said factors, the productivity of the industry has been

improved considerably by five percentages after the lean implementation as shown in Table 3 and Figure 5.

| Table | e 3: Pro | luction Status of MSI-X before and after Lean Implementation |
|-------|----------|--|
| D     | • .•     |  |

| Description                                   | Six Month Average |              |  |  |
|---|-------------------|--------------|--|--|
|   | Before Imple-     | After Imple- |  |  |
|   | mentation         | mentation    |  |  |
| Average units of production per day           | 810.67            | 817.83       |  |  |
| Average units accepted in first level per day | 728.50            | 772.00       |  |  |
| % of accepted units in first level per day    | 89.86             | 94.40        |  |  |
| Average units rejected per day                | 82.17             | 39.00        |  |  |
| Average units of rework per day               | 9                 | 5.17         |  |  |
| Average units of scrap per day                | 73.17             | 33.83        |  |  |
| Average of finished units per day             | 737.50            | 777.17       |  |  |
| % of finished units in final stage per day    | 90.97             | 95.03        |  |  |
|   |                   |              |  |  |


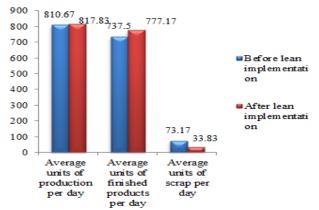



Fig. 4: Production Status of MSI-X before and after Lean Implementation.

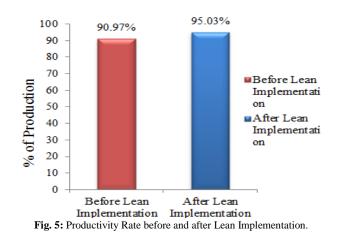

### 5. Conclusion

The development and real time implementation of lean manufacturing model in medium scale industry has been proposed in this paper. The generic lean modeling named LIMS has been proposed for implementing the lean concept in the medium scale industries. The developed model has divided into six major sections. The lean tools like Five S, JIT, Kaizen, six sigma and poke-a-yoke have been suggested for economical and easy implementation in the medium scale industries. As suggested in LIMS model, the current status of the industry has been analyzed and the level of productivity has 90.97 %. Based on the analysis, it has been identified that strong management and leadership, education and training, employee trust, flexible workforce and supplier relationship and involvement as the major critical success factors for the industry. The preferred lean tools such as Five 'S', Kaizen, SMED and JIT have been implemented to improve the productivity.

During the implementation the proper training has been organized for the people working in different level to improve the leadership skill for managers and the supervisors, to imbibe the lean concept and skill oriented training among the workers. To enhance the employee trust the reward system has been implemented through Kaizen and it has helped small improvements. The relationship among the industry and the supplier has strengthened through JIT concept. The flexible work force situation has been implemented by developing cross functional skills. After the lean implementation, the analysis has been made to measure the productivity rate and it became as 95.97 %. The observed results are found to be encouraging and provide appreciable improvements in the productivity rate.

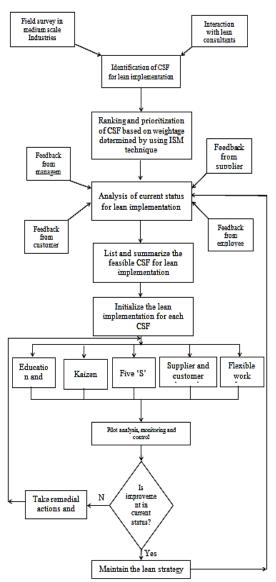



### References

- [1] Achanga, Pius Coxwell, et al. "Lean manufacturing for SMEs: enabling rapid response to demand changes." (2005).
- [2] Bergmiller, Gary G., and Paul R. McCright. "Lean manufacturers' transcendence to green manufacturing." Proceedings of the 2009 Industrial Engineering Research Conference. Vol. 30. 2009.
- [3] Bergmiller, Gary G., and Paul R. McCright. "Parallel models for lean and green operations." Proceedings of the 2009 Industrial Engineering Research Conference, Miami, FL. 2009.
- Bhasin, Sanjay, and Peter Burcher. "Lean viewed as a philosophy." Journal of manufacturing technology management 17.1 (2006): 56-72.
- [5] Browning, Tyson R., and Ralph D. Heath. "Reconceptualizing the effects of lean on production costs with evidence from the F-22 program." Journal of Operations Management 27.1 (2009): 23-44.
- [6] Cezar Lucato and Wagner, "Performance evaluation of lean manufacturing implementation in Brazil." International Journal of Productivity and Performance Management 63.5 (2014): 529-549.
- [7] Chikhalikar, Pratik, and Suman Sharma. "Implementation of Lean Manufacturing in an Engine Manufacturing Unit—A Review." International Journal of Mechanical Engineering and Robotics Research 4.1 (2015): 404.
- [8] Cua, Kristy O., Kathleen E. McKone, and Roger G. Schroeder. "Relationships between implementation of TQM, JIT, and TPM and manufacturing performance." Journal of Operations Management 19.6 (2001): 675-694.

- [9] Diaz-Elsayed, Nancy, et al. "Assessment of lean and green strategies by simulation of manufacturing systems in discrete production environments." CIRP Annals-Manufacturing Technology 62.1 (2013): 475-478.
- [10] Flynn, Barbara B., Roger G. Schroeder, and Sadao Sakakibara. "A framework for quality management research and an associated measurement instrument." Journal of Operations management 11.4 (1994): 339-366.
- [11] Fullerton, Rosemary R., Cheryl S. McWatters, and Chris Fawson. "An examination of the relationships between JIT and financial performance." Journal of Operations Management 21.4 (2003): 383-404.
- [12] Marasini, Bikash, et al. "A model for implementation of lean manufacturing in Indian small scale industries." International Journal of Science, Engineering and Technology Research (IJSETR) 3.5 (2014).
- [13] McKone, Kathleen E., Roger G. Schroeder, and Kristy O. Cua. "The impact of total productive maintenance practices on manufacturing performance." Journal of operations management 19.1 (2001): 39-58.
- [14] Narasimhan, Ram, Morgan Swink, and Soo Wook Kim. "Disentangling leanness and agility: an empirical investigation." Journal of operations management 24.5 (2006): 440-457.
- [15] Nellore, Rajesh, Jean-Jacques Chanaron, and Klas Eric Söderquist. "Lean supply and price-based global sourcing—the interconnection." European Journal of Purchasing & Supply Management 7.2 (2001): 101-110.
- [16] Nellore, Rajesh, Klas Söderquist, and Kjell-Åke Eriksson. "A specification model for product development." European Management Journal 17.1 (1999): 50-63.
- [17] Ping-yu, Yang. "The barriers to SMEs implementation of lean production and its countermeasures-based on SMEs in Wenzhou." Reform Strategy 1 (2009): 148-151.
- [18] Rojasra, P. M., and M. N. Qureshi. "Performance improvement through 5S in small scale industry: a case study." International Journal of Modern Engineering Research 3.3 (2013): 1654-1660.
- [19] Roos, Daniel, James P. Womack, and Daniel Jones. "The Machine That Changed the World: The Story of Lean Production." Rawson/Harper Perennial, New York (1990).
- [20] Samson, Danny, and Mile Terziovski. "The relationship between total quality management practices and operational performance." Journal of operations management 17.4 (1999): 393-409.
- [21] Shah, Rachna, and Peter T. Ward. "Defining and developing measures of lean production." Journal of operations management 25.4 (2007): 785-805.
- [22] Upadhye, Nitin, S. G. Deshmukh, and Suresh Garg. "Lean manufacturing system for medium size manufacturing enterprises: an Indian case."International Journal of Management Science and Engineering Management5.5 (2010): 362-375.